

Kierulff and Co.  
Attn: Mr. Charles Kierulff  
1837-1839 So. Flower St.  
Los Angeles, Calif.



# BURGESS

## REPLACEMENT GUIDE

FOR

## PORTABLE & FARM RADIOS

COMPILED AND EDITED BY HOMER G. SNOOPSHAW, B.R.S.\*

\*BATTERY REPLACEMENT SPECIALIST



BURGESS BATTERY

COMPANY • FREEPORT, ILLINOIS

ISSUED SEPTEMBER 1945

# GUIDE TO PORTABLE RECEIVERS

MAKE	MODEL NO.	BURGESS BATTERIES USED	MAKE	MODEL NO.	BURGESS BATTERIES USED
ADMIRAL Admiral Corp. Chicago, Illinois	78-XP6, 79-XP6, 76-P5 77-P5, 78-P6, 77-P6 164-4D, 335-4Z, 311-4D, 635-4Z, 1035-4Z 336-5N, 236-5N 636-5N, 1036-5N 331-4F 319-4Z, 76-XP5, 77-XP5 231-4F, 231-4Z 33F5, 34F5, 36H5 35G6, 37G6 51-D4 27G4, 28G5 N28G5, 29G5	2 No. M30, 1 No. 8FL  2 No. B30, 1 No. 6F  2 No. B30, 1 No. G5 2 No. A30, 1 No. 4F 2 No. A30, 1 No. 4FL 2 No. A30, 2 No. 4FA 1 No. 6FA60 1 No. 6TA60 1 No. XX45, 2 No. 2 1 No. XX45, 2 No. 2	DE WALD De Wald Radio Mfg. Co. New York, New York	408 544, 408R Tourist, 409 544 415-R, 415-RA 545, 545SW 545LW, 565 410, 564 415 Cub	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 8F 2 No. B30, 1 No. 2F4 2 No. M30, 1 No. 6F  2 No. M30, 1 No. 2F4L 1 No. XX45, 2 No. 2 1 No. 5DA60
AEOLIAN HALL Aeolian Mfg. Co. New York, New York	BP2, BP3 BP4, BP5 BP36 BP8, BP10 BP6, BP943	2 No. M30, 1 No. 2F4L 2 No. B30, 1 No. 6F 2 No. A30, 2 No. G3 2 No. A30M, 1 No. F4PI 1 No. 5DA60	EMERSON Emerson Radio & Phonograph Co. New York, New York	CE259 CE263, CT975, CX305 DC308, CX263, CX283 CX284, CX308 DF302, DF306 DJ310, 311, 312, EA-338, 339, 357 EA-312, 357-A, 385 389, 402, EA1-341 EE-340, 390, 401 EF-363, 424, 427, 428 DU-379, 380, 411	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 8F 2 No. B30, 2 No. G3  2 No. M30, 2 No. G3  1 No. XX45, 2 No. 2
AEROVOICE Aerovoice, Inc. Islip, New York	TR1 D4	2 No. M30, 1 No. B5P 2 No. 2F2H, 4 No. Z30	ESPEY Espey Mfg. Co. New York, New York	942, 942A, 942C, 958 942F, 942P, 943 040 050 052 053	1 No. 5DA60 2 No. B30, 1 No. 4F 2 No. B30, 1 No. F4PI 2 No. B30, 1 No. F4PIX 2 No. M30, 1 No. 2F4L
AIRGUIDE Airguide, Inc.	TR-1 D4-A BR1 BR-D4	2 No. M30, 1 No. 8F, 1 No. B5P 4 No. Z30, 1 No. 2F4 1 No. XX45, 2 No. 2 4 No. Z30, 2 No. F2BP	FADA Fada Radio & Elec. Co., Inc. Long Island, New York	P-40, PD-40, PL-40 P-47, PD-47, PL-58 PL24, P49-SW, P-72, PL-72 PD-49-SW (Export) P-49, PD-49, P-58 P24 P41, PL41 P23, P-70, PL-70 P22, PD22, PL22, P28 PD28 C34, C33, B33, M33, L33	2 No. B30, 1 No. 8F  2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 2 No. M30, 1 No. 2F4L 1 No. D4A60 1 No. 5DA60 1 No. XX45, 2 No. 2  2 No. B30, 1 No. 8F 2 No. B30, 2 No. G3 2 No. B30, 2 No. G3  2 No. M30, 1 No. 2F4L 1 No. XX45, 3 No. 2
AIR KING Air King Products Co. Brooklyn, New York	3906, 3910 3916 4112, 3950 4016 4012 3905, 3912 444	2 No. B30, 1 No. 8F 2 No. B30, 1 No. 6F 2 No. B30, 1 No. 2F4L 2 No. M30, 1 No. 2F4L 1 No. D4A60 1 No. 5DA60 1 No. XX45, 2 No. 2	FARNSWORTH Farnsworth Telev. & Radio Corp. Marion, Indiana	AT-30 AT-31 BT-58, BT-68 CT-59 CT-41, CT-43 CT-60	2 No. Z30, 1 No. 4F 2 No. B30, 1 No. 2F4 1 No. 6FA60 1 No. XX45, 2 No. 2 1 No. 6TA60 2 No. A30, 1 No. 8FL
ANDREA Andrea Radio Corp. Long Island City, N. Y.	21AF5, 21F5, UF51 6G61, 6G61A 6G63, 6G63A	2 No. B30, 1 No. 8F 2 No. B30, 2 No. G3 2 No. B30, 2 No. G3	GAROD Garod Radio Corp. Brooklyn 1, New York	BP11, BP12Q, BP-15, BP24, BP25, BP307, BP308, BP309 BP27, BP28, BP29 BP37, BP36A, BP38 BP12, BP12A, BP12B BP5, BP5A, BP7, BP4 BP9, BP10 BP20 BP6, BP8 BP118	2 No. B30, 1 No. 8F 2 No. B30, 2 No. G3 2 No. B30, 1 No. 2F4 2 No. M30, 1 No. 8FL 2 No. M30, 1 No. 2F4L 1 No. XX45, 3 No. 2 2 No. B30, 1 No. 8FL
ARVIN Noblitt-Sparks Industries, Inc., Columbus, Indiana	802, 803, 822	2 No. M30, 1 No. 8FL	GENERAL (Formerly Climax) General Radio & Telev. Corp. Chicago, Illinois	568, 561, 575 507, 509, 578, 512, 592 611 73	2 No. Z30, 1 No. 4F 2 No. B30, 1 No. 2F4 1 No. 6FA60 1 No. XX45, 2 No. 2 1 No. 6TA60 2 No. A30, 1 No. 8FL
AUTOCRAT Autocrat Radio Co. Chicago, Ill.	90, 98 120 131, 132 161 531, 533	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 2F4 2 No. B30, 1 No. F4PI 2 No. A30, 1 No. 4F 1 No. 2F4A60	GENERAL ELECTRIC General Electric Mfg. Bridgeport, Conn.	GB400, HB408, 401 GB-440 HB504, 505 HB402, HB403, HBX-467 HB410, 411 JB-513, 508, HB412, JB523, JB524, JB514 LB-700, 702, JB630, LB701, LB702, LB703, LB673, JB631 JB410, LB412, LB502 LB603, LB612, LB641, LB642	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 2F4 2 No. B30, 1 No. F4PI 2 No. M30, 4 No. 2 2 No. M30, 1 No. 2F4L 1 No. M30, 1 No. 2 1 No. XX45, 2 No. 2
AUTOMATIC Automatic Radio Mfg. Co., Inc. Boston, Massachusetts	P43, 45, P72, UF51 P57, 58, 61 P40, 41, 50, 51 P60 P80, 81 P30, 33, Tom Thumb Tom Thumb DeLuxe Tom Thumb 3 in 1 Personal	2 No. B30, 1 No. 4F 2 No. B30, 1 No. F4PIX 2 No. M30, 1 No. 2F4L 2 No. M30, 4 No. 2 2 No. M30, 1 No. 2F4L 1 No. M30, 1 No. 2 1 No. XX45, 2 No. 2	GILFILLAN Gilfillan Bros., Inc. Los Angeles, California	4B 5B 6B 5L 4C	2 No. M30, 2 No. G3 2 No. M30, 1 No. G3, 1 No. F4L 2 No. A30M, 2 No. G3 2 No. B30, 1 No. G5 2 No. B30, 1 No. 4F 2 No. A30M, 1 No. F4PI 1 No. XX45, 3 No. 2 1 No. 5DA60 2 No. B30, 1 No. 2F4
BELMONT Belmont Radio Co. Chicago, Illinois	403, 460, 509, 553, 511 407 507, 513, 590 503	2 No. B30, 1 No. 8F 2 No. A30, 1 No. 4FL 2 No. A30, 1 No. F4PI 1 No. Z59, 1 No. 2F	GREBE Grebe Mfg. Co., Inc. New York, New York	BP4, BP5	2 No. B30, 1 No. 6F 2 No. B30, 1 No. F4PI 2 No. B30, 2 No. G3 1 No. A60, 1 No. 4F
BESTONE Hamilton Radio Corp. New York City, N. Y.	D-115 PT-50, PT-51 PQ61	2 No. M30, 1 No. F4L 2 No. M30, 1 No. F4PI 2 No. M30, 2 No. G3	HOWARD Howard Radio Co. Chicago, Illinois	14-ACB 10B 11B	2 No. B30, 1 No. 8F 2 No. B30, 1 No. 6F 2 No. B30, 1 No. 2F4  2 No. Z30, 1 No. 4F 2 No. M30, 1 No. 8FL 2 No. M30, 1 No. 2F4L  2 No. M30, 2 No. G3 1 No. XX45, 2 No. 2
CLARION Clarion Radio Co. Chicago, Illinois	0-464 0-534, 535, 539 531, 532, 533, 536 541, 543, 0-53 1-53	2 No. M30, 1 No. 8FL 2 No. B30, 1 No. F4PI 2 No. B30, 1 No. 2F4 1 No. 2F4A60	KADETTE Kadette Radio Corp. Ann Arbor, Michigan	L34	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 2 No. B30, 2 No. G3 1 No. F5A60 2 No. M30, 1 No. 4F
COLUMBIA Columbia Association New York City	164	2 No. B30, 1 No. 4F	KARADIO Eckstein Radio & Television Co. Minneapolis, Minnesota	905	2 No. M30, 2 No. G3 2 No. B30, 1 No. 8F 2 No. M30, 1 No. 8F  2 No. M30, 1 No. 2F4L
COLONIAL Colonial Radio Corp. Buffalo, New York	985514 563, 575 GM-985775	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 8F 1 No. XX45, 1 No. 1			2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 2 No. B30, 2 No. G3 1 No. F5A60 2 No. M30, 1 No. 4F
CROSLLEY Crosley Corp. Cincinnati, Ohio	B429A 27BD, 27BE 45BV 549 439 5549A	2 No. B30, 1 No. 8F 2 No. M30, 1 No. 2F4L 1 No. XX45, 1 No. 2 1 No. F4A41 1 No. 4GA42 2 No. B30, 1 No. 2F4			2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 1 No. 4GA42 2 No. M30, 2 No. G3 1 No. XX45, 2 No. 2
DELCO Delco Radio Division General Motors Corp. Kokomo, Indiana	R-1400 R-1401, R-1402, R-1405, R-1406, RC-527E R-1407, RC-562	2 No. B30, 1 No. 8F 2 No. A30, 1 No. 4FL 2 No. M30, 1 No. 6F 2 No. M30, 2 No. G3			2 No. M30, 2 No. G3 2 No. B30, 1 No. 8F 2 No. M30, 1 No. 8F
DETROLA Detrola Radio Corp. Detroit, Michigan	Pee Wee No. 282 286, 288 295 289, 299 303 339, 3401, 3412, 360 3601, 3602, 3603 372, 378, 389	1 No. A60, 1 No. 4F 2 No. B30, 1 No. 8F 2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 1 No. 4GA42 2 No. M30, 2 No. G3 1 No. XX45, 2 No. 2			2 No. M30, 1 No. 2F4L

# GUIDE TO FARM RADIO SETS

MAKE	MODEL NO.	BURGESS BATTERIES USED	MAKE	MODEL NO.	BURGESS BATTERIES USED
ADMIRAL Continental Radio & Telev. Chicago, Illinois	39A4, 40A4, 41B4, 24A5, 10A5, 516-4B, 141-4A, 151-4A, 104-4A, 204-4A, 504-4A, 241-4A, 541-4A, 351-4A, 451-4A, 228-4C, 206-4J, 81-F4, 306-4J, 606-4J, 51-E5, 80-E4, 66-C4	1 No. 17GD60	MAJESTIC Majestic Radio and Telev. Co. Chicago, Illinois	TO81-A, TO81-C	1 No. 17GD60
AUTOCRAT Autocrat Radio Co. Chicago, Illinois	105 421, 422, 427, 431	2 No. 2308, 1 No. 20F 1 No. 17GD60	MANTOLA Goodrich Silvertown Stores	R470, R471, R478	1 No. 17GD60
BELMONT Belmont Radio Co. Chicago, Illinois	418, 551 524 4BA2	2 No. 2308, 1 No. 20F 2 No. 2308, 1 No. 22F2 1 No. 17GD60	MOTOROLA Galvin Mfg. Company Chicago, Illinois	49BT1, 49BT2, 40BK, 40BW, 52BK, 52BW, 41B11, 41B12	1 No. 17GD60
CLARION Warwick Mfg. Co. Chicago, Illinois	423, 424, 432, 428	1 No. 17GD60	PHILCO Philco Radio & Telev. Company Philadelphia, Penna.	30 36, 35	1 No. 48G2★, 4 No. 21308★★, 1 No. 5540 1 No. 48G2, 3 No. 21308, 1 No. 5156
CROSLLEY Crosley Corp. Cincinnati, Ohio	D-36-BS, 589, 5589 458 All 2 volt sets All 1.5 volt sets	1 No. 17GD60 2 No. 2308, 1 No. 20F 2 No. 21308, 1 No. 40F 2 No. 21308, 1 No. 20F		34, 34A 37, 38, 38A, 38A-123, 623 623A, 643, 643A, 37-33, 37-38, 37-623, 37-643, 38-33, 38-38, 38-623, 38-643 39-39A 39-70, 39-75, 39-80, 39-85 40-90, 40-95, 40-100, 40-105, 40-110	1 No. 48G2, 1 No. G90D6 1 No. 48G2, 1 No. G90D8 1 No. 1-3, 1 No. D60 1 No. 17GD60
DETROLA Detrola Radio Corp. Detroit, Michigan	103	1 No. 20F2, 2 No. 2308	RCA VICTOR RCA Mfg. Company Camden, New Jersey	94BK1, 94BT1, 94BK2, 94BT2, 4QB, 4QB4, BT40, BK41, BT41, BT42, 34BT, 35BT, 25BT-1-2-3, QB-1 to 9, 24BT-1-2-3, 14BT-12, 14BK, 15BT, RB-51-52-54, B50	2 No. 2308, 1 No. 20F 1 No. 17GD60
EMERSON Emerson Radio & Phonograph New York FADA Fada Radio & Elec. Co. Long Island, New York	CX285, CE260 EB344, EB359, EW391 144, 145	1 No. 17GD60 1 No. 3G6D60 1 No. 17GD60	SENTINEL Sentinel Radio Corp. Evanston, Illinois	118B, 127B, 265-W, 265T, 265C, 267L, 267T, 267C, 240W, 241T, 242T, 242L, 241C, 242C, 243C, 243T, 175B, 176B, 266T, 266T, 271C, 273T, 273C, 275T, 275C	1 No. 17GD60
FARNSWORTH Farnsworth Telev. & Radio Corp. Marion, Indiana	AT-40, BT-40, BT-41, BC-45, BT-57, CT-42	1 No. 17GD60	SETCHELL-CARLSON Setchell-Carlson, Inc. St. Paul, Minnesota	23 401 23A	2 No. 10308, 2 No. 4FA 2 No. 10308, 4 No. 4FA 1 No. 17GD60
GENERAL ELECTRIC General Electric Co. Bridgeport, Conn.	JB420, JB520, JB525, LB424 FB52, FB56, FB72, FB76 G5-401 U100 U50	1 No. 17GD60 1 No. 20F2, 2 No. 10308, 1 No. 2370 S. T. 2 No. 2308, 1 No. 19G or 17GD60 1 No. 20F2, 3 No. 10308, 1 No. 5156SC 1 No. 20F2, 2 No. 10308	SONORA Sonora Radio & Telev. Corp. Chicago, Illinois	TH-46, KZ-111, LZ183	1 No. 17GD60
HOWARD Howard Radio Company Chicago, Illinois	48T, 9B, 12B	1 No. 17GD60	STEWART-WARNER Stewart-Warner Corp. Chicago, Illinois	02-421, 02-427, 02-428 02-481, 02-484, 02-511, 02-4C1, 12-4D1, 205CA	1 No. 17GD60
KNIGHT Allied Radio Corp. Chicago, Illinois	A-9760, A-9761, A-9762 A-10775, A-10785, A-10786 A-10788, A-10790, A-10792, A-10879, A-10880, A-10882, A-10884, A-10885, A-10886, A-10887, A-10888, A-10892, A-10896, A-10897, A-10898, B-10520, B-10541, B-10546, B-10547, B-10548, B-10567, B-10574, B-10581, B-10716, B-10717, B-17141, B-17142, D-140, D-145, D342, E-10912, E-10913, E-10914, E-10915, E-10916, E-10917, B-10740, B-10742, B-10743, B-10741, B-10744, B-10746, B-10747 E-10835, E-10836, E-10908, E-10909, E-10910, E-10911	1 No. 20F2, 2 No. 5308, 1 No. 5156 1 No. 17GD60 3 No. 5308, 1 No. 20F2	TRAV-LER Trav-ler Radio & Telev. Corp. Chicago, Illinois	551B, 552B	1 No. 17GD60
LAFAYETTE Radio Wire Telev. Inc. New York, N. Y.	E59, E60	1 No. 17GD60	TROUBADOR Warwick Mfg. Company Chicago, Illinois	421, 422, 431 427, 429	1 No. 17GD60
L'TATRO L'Tatro Mfg. Company Decorah, Iowa	519	1 No. 17GD60	WELLS-GARDNER Wells-Gardner & Co. Chicago, Illinois	OF 6G B1 B4	2 No. 20F2, 3 No. 2308, 1 No. 5156 2 No. 20F, 2 No. 2308, 1 No. 5540 3 No. 20F2, 2 No. 2308 1 No. 20F, 2 No. 2308
			ZENITH Zenith Radio Corp. Chicago, Illinois	4K-331, 310, 355, 465, 466, 435, 422, 515, 535, 570, 329, 5G-441, 442, 438, 461, 467, 458, 459 5G537, 572, 5G500, 5G510, 534	1 No. 18GD60 1 No. 398 1 No. 739 1 No. 3G4D50

Where cabinet size permits, any radio designed for two 45 volt B batteries and one 1 1/2 volt A battery may be operated from the Burgess No. 17GD60 by using the No. 59 adapter plug.

★40F2 or 20F2 may be substituted for the 48G2.  
★★The 10308 or 2308 may be substituted for the 21308.


(Additional Portable Listings Inside)

# BURGESS

# GUIDE TO PORTABLE RECEIVERS—(Con't)

MAKE	MODEL NO.	BURGESS BATTERIES USED	MAKE	MODEL NO.	BURGESS BATTERIES USED
KARNS-WHITE Karns-White Corp. New York, New York	400, 805 DF	2 No. B30, 6 No. 2 2 No. M30, 2 No. G3	MOTOROLA Galvin Mfg. Co. Chicago, Illinois	41-D1, 41-D2, 51-D1 51-D2, 52D 57BP1, 57BP2, 57BP3, 57BP4, 65BP1, 65BP2, 65BP3, 65BP4, 61L11, 61L12 41H A1 41S Sporter	2 No. B30, 1 No. 6F  2 No. M30, 2 No. G3  2 No. M30, 1 No. 4F 1 No. XX45, 2 No. 2 1 No. W90P1, 1 No. W34, 1 No. 2F 1 No. 3FA60 1 No. XX45, 5 No. 2 2 No. Z30, 1 No. 4F
KNIGHT Allied Radio Corp. Chicago, Illinois	A-10700, A-10701, A-10725 A-10730 A-10748 A-10761 A-10795 A-10826 A-10848 A-10855 A-10872 A-10873 A-10889 B-10505, B-10506 B-10521, B-10522, B-10523 B-10524 B-10540, B-10545 B-10562, B-10563, B-10564, B-10565 B-10595 B-10606, B-17107, B-17108, B-10600 B-17109 B-17111, B-17112 B-17115 B-17131 B-17132, B-17133, B-17134 D-155, D-156, D-157 D-160, D-161  D-162, D-165, E-10061 D-366, D-367 E-17015-PL29 E-10716-XL28 E-10755, E-10756 E-10757 E-10758 E-10775-178BL E-10777-171AS E-10925 N-2812 Early Mode N-2812 Late Model N-2870, N-2871 5N, 5NL	1 No. 6FA60 1 No. Z30, 3 No. 2 2 No. M30, 1 No. F4PI 2 No. M30, 1 No. 8FL 2 No. B30, 1 No. 2F4 1 No. 5DA60 2 No. B30, 1 No. 6F 2 No. B30, 1 No. G5 2 No. 5308, 1 No. 8F 2 No. B30, 1 No. 2F4 2 No. B30, 1 No. 8F 1 No. Z30, 3 No. 2 2 No. A30, 1 No. F4PI 2 No. A30, 1 No. F4PI 1 No. 6FA60 2 No. M30, 2 No. G3 2 No. A30, 1 No. 8F 1 No. XX45, 3 No. 2 2 No. A30, 1 No. 8F 2 No. M30, 1 No. 2F4L 2 No. A30, 1 No. 8F 1 No. Z30, 3 No. 2 1 No. XX45, 3 No. 2 1 No. 2FA60 or 2 No. M30, 1 No. 2F4 2 No. B30, 1 No. 8F 2 No. B30, 2 No. G3 1 No. 5DA60 1 No. 5DA60 1 No. 4TA60 2 No. B30, 1 No. 2F4 2 No. B30, 1 No. 8F 2 No. B30, 1 No. 4F 1 No. 6TA60 1 No. 2FA60 2 No. B30, 1 No. 2F4 1 No. 4TA60 2 No. B30, 1 No. G5	NAMCO Hamilton Radio Corporation New York City New York	D-110, 111, 112	2 No. M30, 1 No. 2F4L
LA FAYETTE Radio-Wire-Telev., Inc. New York, New York	A-221, CC-72, BS33A, T56 BB-70, BS-56, E-6, E-72 BB-73 BP-7, BS-72, BS-85, CC-55 CC-55A BS-33, D-93 C-116, C-121, C-125, CC-58, CC-58A, CC-58B, E-193 C-160 E-94 JS-130 S-50 E-191, EB-164, S-161 JS-114, JS-115 E-80, E-94 E-92	2 No. B30, 1 No. G5 2 No. B30, 1 No. 8F 2 No. B30, 2 No. G3 2 No. B30, 1 No. 4F 2 No. B30, 1 No. F4PI 2 No. M30, 2 No. G3 2 No. M30, 1 No. G3, 1 No. F4L 2 No. M30, 1 No. 2F4L 2 No. M30, 1 No. 8FL 2 No. M30, 1 No. 6F 1 No. XX45, 2 No. 2 1 No. XX45, 3 No. 2 2 No. B30, 1 No. 2F4 2 No. B30, 1 No. 4F	OLYMPIC Hamilton Radio Corp. New York	PQ61 PT 50, PT51	2 No. M30, 2 No. G3 2 No. M30, 1 No. F4PI
LEARADIO Lear Developments, Inc. New York, New York	APR-1 APR-A	1 No. Z59, 1 No. 2F 2 No. A30, 1 No. G5	PACKARD-BELL Packard-Bell Co. Los Angeles, California	40 40-B, 40-A 56, 57 54, 56A, 57A 41	2 No. B30, 1 No. 4F 2 No. B30, 1 No. F4PI 2 No. M30, 1 No. 8FL 1 No. 2GA60 1 No. 6TA60
LEAR AVIAN Lear, Inc. Grand Rapids, Mich.	RM-402A, 402B	2 No. A30, 1 No. G5	PIERCE-AIRO Pierce-Airo, Inc. New York, New York	408	2 No. B30, 1 No. 6F
L'TATRO Eckstein Radio & Telev. Co. Decorah, Iowa	819 1000 S-1000	2 No. B30, 1 No. 4F 2 No. A30, 1 No. 4F 10 No. 2	PHILCO Philco Radio & Telev. Corp. Philadelphia, Penn.	39-71, 72, 73 40-74, 504 39-75, 40-81, 82 40-PT-63 40-88 41-81, 83 41-84, 85 41-PT-87 41-842T, 843T, 844T 41-853T, 854T 41-841, 851	2 No. B30, 1 No. 8F 2 No. A30M, 1 No. 4F 2 No. M30, 1 No. 2F4L 2 No. M30, 2 No. G3 2 No. B30, 1 No. 4F 1 No. 4GA42 1 No. 6FA60 1 No. 4GA41 1 No. 2FA60 1 No. G5A42 2 No. M30, 2 No. G3 1 No. 2FA60
MAGNAVOX The Magnavox Co., Inc. Ft. Wayne, Indiana	41, 10	2 No. B30, 1 No. 4F	PORT-O-MATIC Port-O-Matic Corp. New York, New York	U17A, U17C, BE-27 USW17A, USW17C BE-27A, BE-27SC BE-27R	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F or 8F
MAJESTIC Majestic Radio & Telev. Corp. Chicago, Illinois	420PL, 421, 430PL, 431 130U 130 1BR50B, 1BR50BP 5BD, 5ULBD, 546BD	2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 1 No. W40, 1 No. FX 2 No. M30, 1 No. F4PI 2 No. A30, 1 No. 4FL	RCA VICTOR DIV. Radio Corp. of America Camden, New Jersey	94BP1, 4, 61, 62, 64, 66, 80, 81, 96GA, T4  BP55, 56, 85, RC455 15-BP-1, to 15-BP-7, P5 25BP, 25 BPA BP-10, 54B AVR100, 101 AVR102, 26BP, 36BP RC527, 527A RC407, 410	2 No. B30, 1 No. 2F4L 2 No. M30, 1 No. 6F 1 No. XX45, 1 No. 2 1 No. 4FA50 2 No. M30, 2 No. G3 2 No. B30, 1 No. 6F 2 No. B30, 1 No. 4F 3 No. 2308 or 10308, or 5308, 4 No. 4FA 1 No. 5DA60 2 No. B30, 1 No. 4FA 1 No. XX45, 4 No. 2
MEISSNER Meissner Mfg. Co. Mt. Carmel, Illinois	10-1187 Kit 10-1189, 10-1140 12-1031	2 No. B30, 1 No. 4F 2 No. A30M, 2 No. G3	R M E Radio Mfg. Engineers, Inc. Peoria, Illinois	ME-14, ME-14AM	2 No. Z30N, 1 No. 2FBP
MID-WEST Mid-West Radio Corp. Cincinnati, Ohio	39-P5, 40-P5, 41-P5 51 BT	2 No. B30, 1 No. F4PI 2 No. B30, 1 No. 4F	SENTINEL Sentinel Radio Corp. Evanston, Illinois	927P, 247P 217P, 219P, 228P 928P 202BL, 172BL, 205BL 213XL, 192XL 151BL, 127BL RC-181BL, 178BL 201XL, 180XL (later Model) 180XL (early Model) 160BL, 170BL 179BL 261P 181BL	1 No. XX45, 2 No. 2 2 No. M30, 2 No. G3 2 No. M30, 2 No. G3 2 No. M30, 1 No. 8FL 2 No. M30, 1 No. 2F4L 2 No. B30, 1 No. 4F 2 No. B30, 1 No. 6F 2 No. B30, 1 No. F4PI 1 No. 2FA60 1 No. 4TA60 2 No. B30, 1 No. 8F 2 No. M30, 1 No. G3 1 No. 50A60
MISSION BELL Hoffman Radio Corp. Los Angeles, California	400, 500, 501 503 502 504 505 506 508	2 No. B30, 1 No. 4FA 2 No. B30, 1 No. 4F 2 No. M30, 1 No. 8FL 2 No. A30, 1 No. F4PI 2 No. A30, 1 No. G5 2 No. M30, 2 No. G3 1 No. XX45, 5 No. 2	SETCHELL-CARLSON Setchell-Carlson, Inc. St. Paul, Minnesota	55 23 40	2 No. B30, 4 No. 2 2 No. B30, 2 No. 4F 2 No. B30, 4 No. 4F
			SKY CHIEF Sky Chief Radio Corp. New York, New York	A212, A213, 216, 214 219 215, 218 226, 233, 229 234, 235 225, 227, 209	2 No. B30, 1 No. 4F 2 No. B30, 1 No. F4PIX 2 No. B30, 1 No. 8F 2 No. M30, 1 No. F5 1 No. XX45, 2 No. 2 1 No. D5A60
			SONORA Sonora Radio & Telev. Corp. Chicago, Illinois	LR-147, KBU-168, LR-193 XL-28, XL-29 KB-73, KD-75, KB-75 KG80, KG132 LP-161, LP-162, LP-163 PL29, PL37, TF39 400, 805	2 No. A30, 1 No. F4PI 2 No. B30, 1 No. 4F 2 No. B30, 1 No. 2F4 1 No. Z30, 3 No. 2 1 No. XX45, 3 No. 2 1 No. 5DA60 2 No. B30, 6 No. 2



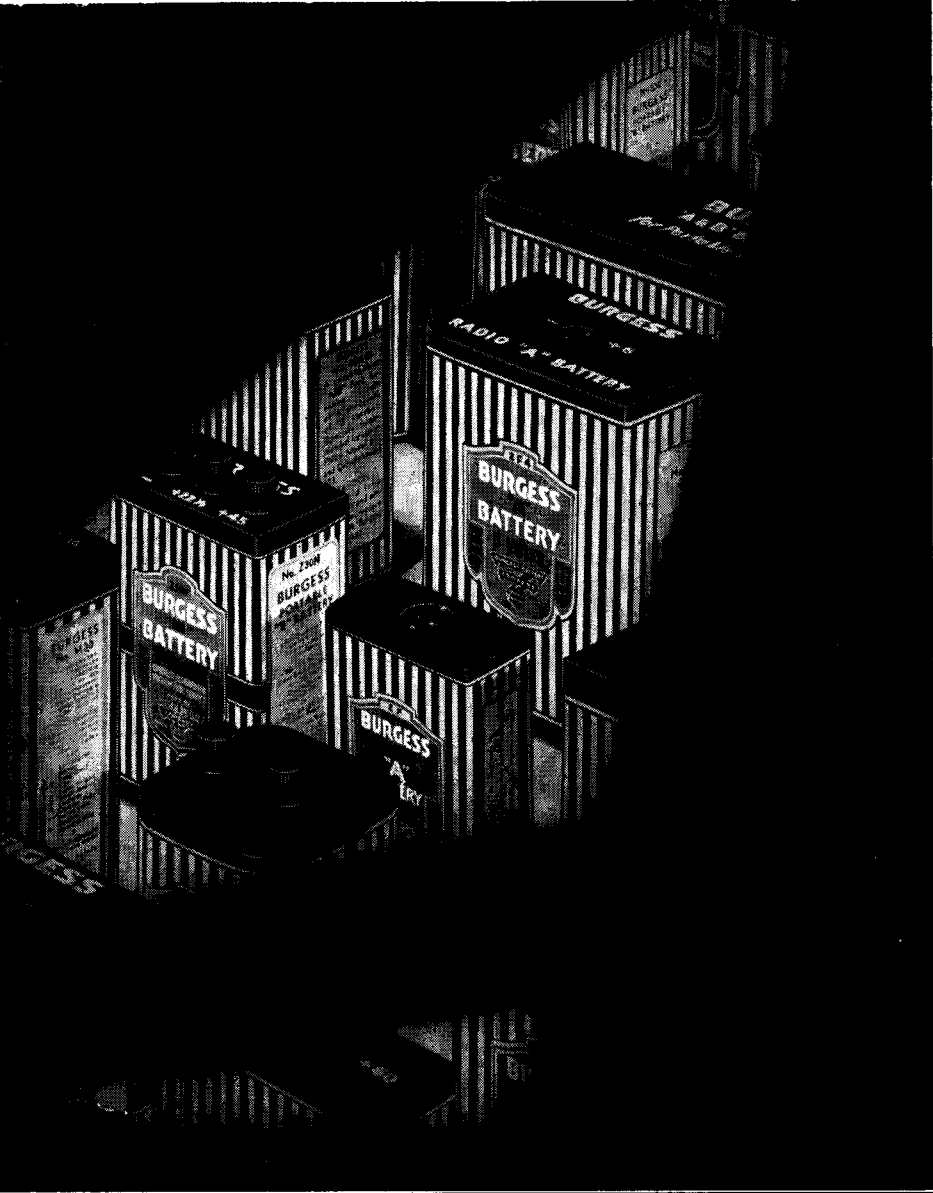

*What*

*The*

**COMPLETE  
REPLACEMENT  
LINE**

*Means To You*

The Burgess line identifies you as headquarters for the complete dry battery line . . . not only for radios, but for flashlights, telephones, hearing aids and ignition service. Their black and white stripes are recognized as a symbol of quality. Your customers know that every Burgess Battery carries the Burgess name . . . which means their assurance of long-life economy operation.

**BURGESS BATTERY COMPANY**

FREEPORT, ILLINOIS